

# FR 7100.SCC.US



<b>SLIDE TYPE:</b>	Full-Extension Drawer Slide - Progressive-Action
<b>MOUNTING:</b>	Bottom Mount

<b>WIDTH:</b>	24 mm (0.95 in.)
<b>LOAD CAPACITY:</b>	dynamic up to <b>125 kg (275 lbs.)</b> (full-ext.) dynamic up to <b>105 kg (231 lbs.)</b> (over-ext.)




<b>MATERIAL:</b>	stainless steel
------------------	-----------------


<b>FEATURES:</b>	solid Delrin* rollers Delrin* encased steel roller bearings
------------------	--

<b>OPTION:</b>	▶ also available with mounting tabs
----------------	-------------------------------------

<b>SPECIFICATIONS:</b>	<ul style="list-style-type: none"> <li>▶ special narrow drawer profile for standard serving pans</li> <li>▶ cabinet profile bottom-mount without screw holes for welding</li> <li>▶ high lateral stability through specially formed middle profile and guide rollers</li> <li>▶ ideal running characteristic and smoothness of running through integrated progressive-action</li> <li>▶ lift out prevention clip mounted in middle profile</li> <li>▶ double-sided captive profile</li> <li>▶ self-closing</li> <li>▶ operating temperature range -20° C to +80° C (-4° F to 176° F)</li> </ul>
------------------------	---

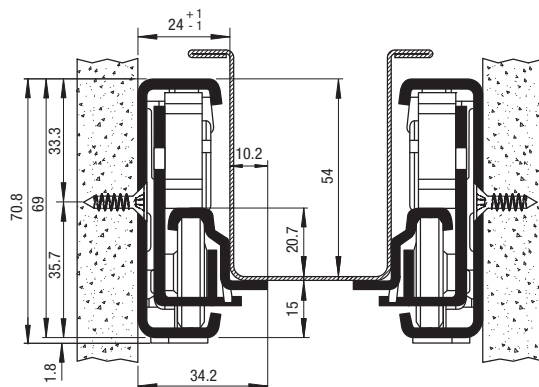

<b>OPTIONS:</b>	<ul style="list-style-type: none"> <li>▶ on request, FR7100.SCC.US is also available with 60 mm (2.36 in.) over-extension</li> <li>▶ on request, also available in a heat resistant version for up to 110° C (230° F) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)</li> </ul>
-----------------	---

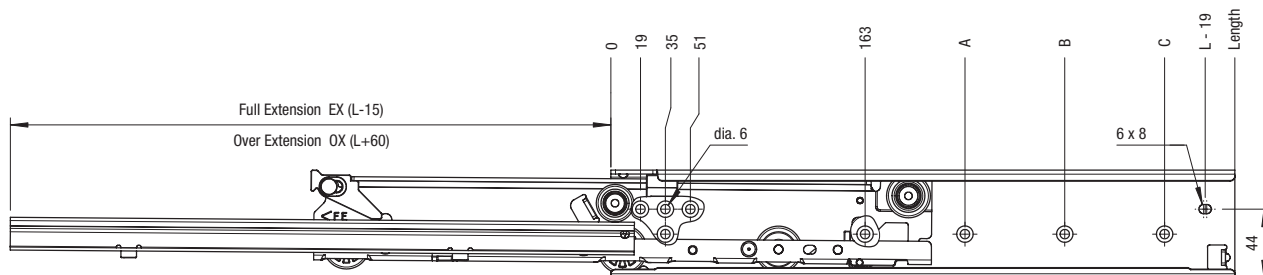

Length L	EX full-extension	OX over-extension	A	B	C	Weight	Order No.	Order No.
mm in	mm in	mm in	mm in	mm in	mm in	kg lbs	full-extension	over-extension
400 15.75	385 15.16	460 18.11	323 12.72			*	83146	*
450 17.72	435 17.13	510 20.08	355 13.98			*	*	*
500 19.69	485 19.09	560 22.05	291 11.46	451 17.76		*	*	*
550 21.65	535 21.06	610 24.02	323 12.72	483 19.02		*	82186	*
600 23.62	585 23.03	660 25.98	355 13.98	547 21.54		*	82187	*
650 25.59	635 25.00	710 27.95	355 13.98	611 24.06		*	82188	*
700 27.56	685 26.97	760 29.92	355 13.98	515 20.28	643 25.31	*	*	*
750 29.53	735 28.94	810 31.89	355 13.98	547 21.54	675 26.57	*	*	*

Packing Unit: 400-600 mm: 4 sets per box, 650-750 mm: 2 sets per box

\* on request

\*DuPont (TM) Delrin®