

FR 7101.SCC



SLIDE TYPE:	Full-Extension Drawer Slide - Progressive-Action
MOUNTING:	Side Mount

WIDTH:	24 mm (0.95 in.)
LOAD CAPACITY:	dynamic up to 125 kg (275 lbs.) (full-ext.) dynamic up to 105 kg (231 lbs.) (over-ext.)




MATERIAL:	stainless steel
------------------	-----------------


FEATURES:	solid Delrin* rollers Delrin* encased steel roller bearings
------------------	--

OPTION:	▶ also available with mounting tabs
----------------	-------------------------------------

SPECIFICATIONS:	<ul style="list-style-type: none"> ▶ cabinet profile side-mount without holes for welding ▶ high lateral stability through specially formed middle profile and guide rollers ▶ ideal running characteristic and smoothness of running through integrated progressive-action ▶ lift out prevention clip mounted in middle profile ▶ double-sided captive profile ▶ self-closing ▶ operating temperature range -20° C to +80° C (-4° F to 176° F)
------------------------	--

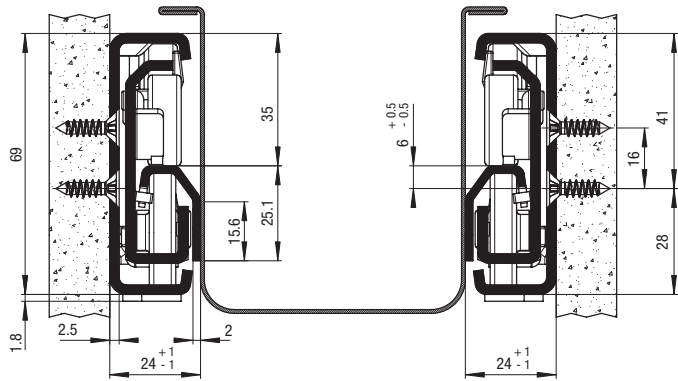

OPTIONS:	<ul style="list-style-type: none"> ▶ on request, FR 7101.SCC is also available with 60 mm (2.36 in.) over-extension ▶ on request, also available in a heat resistant version for up to 110° C (230° F) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)
-----------------	---

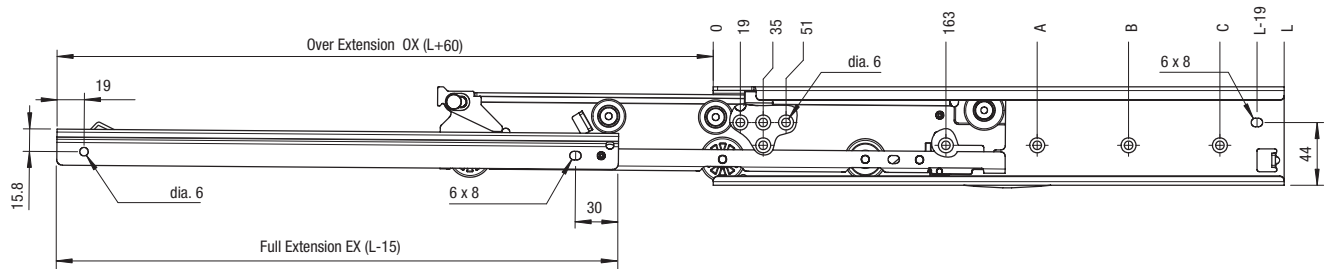

Length L	EX full-extension		OX over-extension		A		B		C		Weight	Order No.	Order No.
	mm	in	mm	in	mm	in	mm	in	mm	in			
400	15.75	385	15.16	460	18.11	323	12.72				*	7110	*
450	17.72	435	17.13	510	20.08	355	13.98				*	7111	*
500	19.69	485	19.09	560	22.05	291	11.46	451	17.76		*	7112	7122
550	21.65	535	21.06	610	24.02	323	12.72	483	19.02		*	7113	7123
600	23.62	585	23.03	660	25.98	355	13.98	547	21.54		*	7114	7124
650	25.59	635	25.00	710	27.95	355	13.98	611	24.06		*	7115	*
700	27.56	685	26.97	760	29.92	355	13.98	515	20.28	643	25.31	7116	*
750	29.53	735	28.94	810	31.89	355	13.98	547	21.54	675	26.57	7117	*

Packing Unit: 400-600 mm: 4 sets per box, 650-750 mm: 2 sets per box

* on request

*DuPont (TM) Delrin®

