

# FR 790.SCC



<b>SLIDE TYPE:</b>	Progressive-Action Full-Extension Drawer Slide
<b>MOUNTING:</b>	Side Mount

<b>WIDTH:</b>	18 mm (0.71 in.)
<b>LOAD</b>	dynamic up to <b>80 kg (175 lbs)</b> full-ext.
<b>CAPACITY:</b>	dynamic up to <b>65 kg (150 lbs)</b> over-ext.




<b>MATERIAL:</b>	stainless steel
------------------	-----------------

<b>FEATURES:</b>	solid Delrin* rollers
------------------	-----------------------


<b>CUSTOMIZATION:</b>	<ul style="list-style-type: none"> <li>▶ available with mounting tabs and a variety of drawer, middle and cabinet profile configurations for specific customer requirements</li> </ul>
-----------------------	--

<b>SPECIFICATIONS:</b>	<ul style="list-style-type: none"> <li>▶ cabinet and drawer profile with screw holes</li> <li>▶ high lateral stability through specially formed middle profile with material thickness 2 mm (0.8 in.) and guide rollers</li> <li>▶ ideal running characteristic and smoothness of running through integrated progressive-action</li> <li>▶ lift out prevention clip mounted in middle profile</li> <li>▶ double-sided captive profile</li> <li>▶ self-closing</li> <li>▶ soft stop</li> <li>▶ operating temperature range -20° C to +80° C (-4° F to 176° F)</li> </ul>
------------------------	---

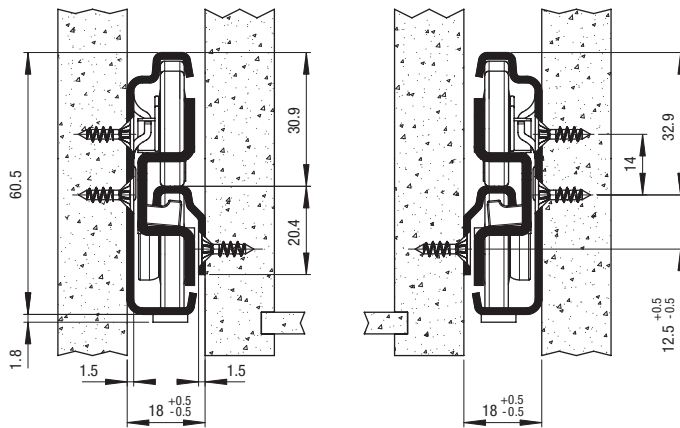

<b>NOTE:</b>	<ul style="list-style-type: none"> <li>▶ compatible with regular-extension drawer slide FR 1052.SCC</li> </ul>
--------------	--

<b>OPTIONS:</b>	<ul style="list-style-type: none"> <li>▶ on request, FR 790.SCC is also available with 60 mm (2.36 in.) over-extension</li> <li>▶ on request, also available in a heat resistant version for up to 110° C (230° F) – load capacity 50 kg (full-ext.), 40 kg (over-ext.)</li> </ul>
-----------------	--

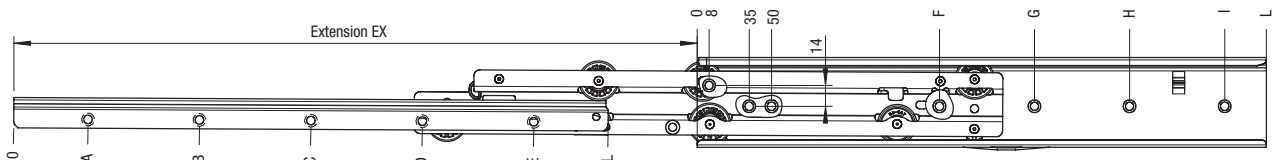

Length L	EX		EX		A	B	C	D	E	F	G	H	I	Weight		Order No.	Order No.										
	mm	in	full-ext.	over-ext.										mm	in			mm	in	mm	in	mm	in	kg	lbs	full-extension	over-extension
350	13.78	335	13.19	410	16.14	28	1.10	156	6.14	316	12.44			163	6.42	291	11.46	1.71	3.77	7900	*						
400	15.75	385	15.16	460	18.11	28	1.10	156	6.14	380	14.96			163	6.42	355	13.98	1.95	4.30	7901	*						
450	17.72	435	17.13	510	20.08	28	1.10	156	6.14	316	12.44	412	16.22	163	6.42	355	13.98	2.19	4.83	7902	*						
500	19.69	485	19.09	560	22.05	28	1.10	156	6.14	348	13.70	476	18.74	163	6.42	355	13.98	451	17.76	2.43	5.36	7903	*				
550	21.65	535	21.06	610	24.02	28	1.10	156	6.14	348	13.70	508	20.00	163	6.42	355	13.98	483	19.02	2.67	5.89	7904	7924				
600	23.62	585	23.03	660	25.98	28	1.10	156	6.14	348	13.70	572	22.52	195	7.68	355	13.98	547	21.54	2.91	6.42	7905	*				
650	25.59	635	25.00	710	27.95	28	1.10	156	6.14	348	13.70	604	23.78	163	6.42	355	13.98	547	21.54	3.15	6.95	7906	7926				
700	27.56	685	26.97	760	29.92	28	1.10	156	6.14	348	13.70	540	21.26	668	26.30	163	6.42	355	13.98	547	21.54	643	25.31	3.39	7.47	7907	*
750	29.53	735	28.94	810	31.89	28	1.10	156	6.14	348	13.70	572	22.52	732	28.82	163	6.42	355	13.98	547	21.54	643	25.31	*	*	*	*

Packing Unit: 5 sets per box

\* on request

\*DuPont (TM) Delrin®